



SYMPHONY

GARAGE DOOR



TEL: 0086-13903702206
EMAIL: sales@symphonydoor.com
WEB: www.symphonydoor.com

WHATSAPP:





Table of Contents

**Symphony Garage
Door**

Why Us

Custom Solutions

Other Products






Symphony Garage Door

Symphony Garage Doors Ltd. is a high-tech enterprise specializing in low-energy building construction as well as the R&D and manufacturing of the whole balcony and other products in Jiangsu, China. Company business includes independent research and development, manufacturing, sales and installation of electric garage doors, industrial doors, system window and door products and other related automation products. Symphony is committed to providing customized garage door product solutions to meet personalized needs. We offer flexible designs to match various home styles. Our success is based on the extraordinary product quality and designing aesthetics that keep pace with the times.


Why Us

Symphony's garage door business began in 1999 and started flow line production in 2005. In 2020, a second Korean polyurethane wall panel flow line was put into production and the average daily output of door panels is 5000 meters.

Pictures show Symphony's own manufacturing line of garage door panels where the raw material goes through embossing, shaping, Polyurethane injection and foaming, compression, cutting and is finally packaged.

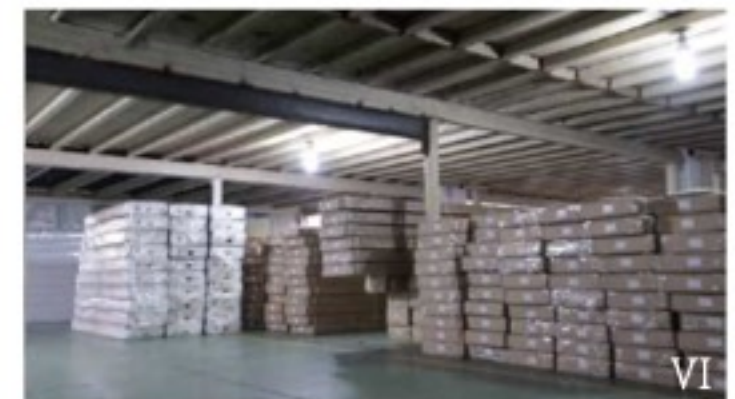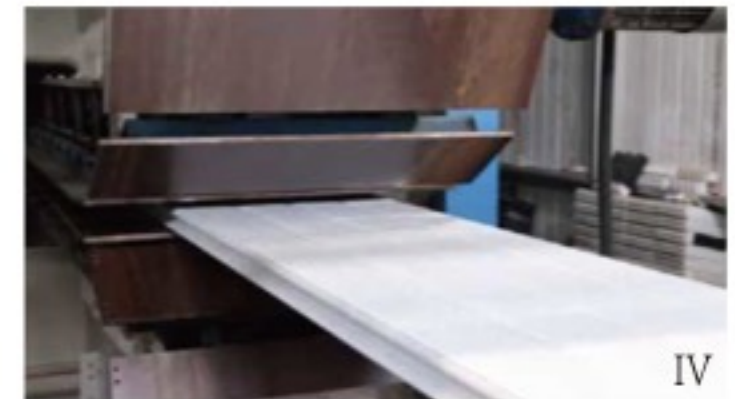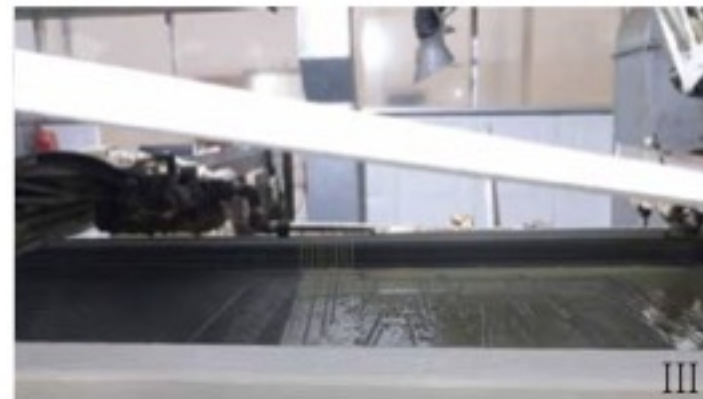

Why Us

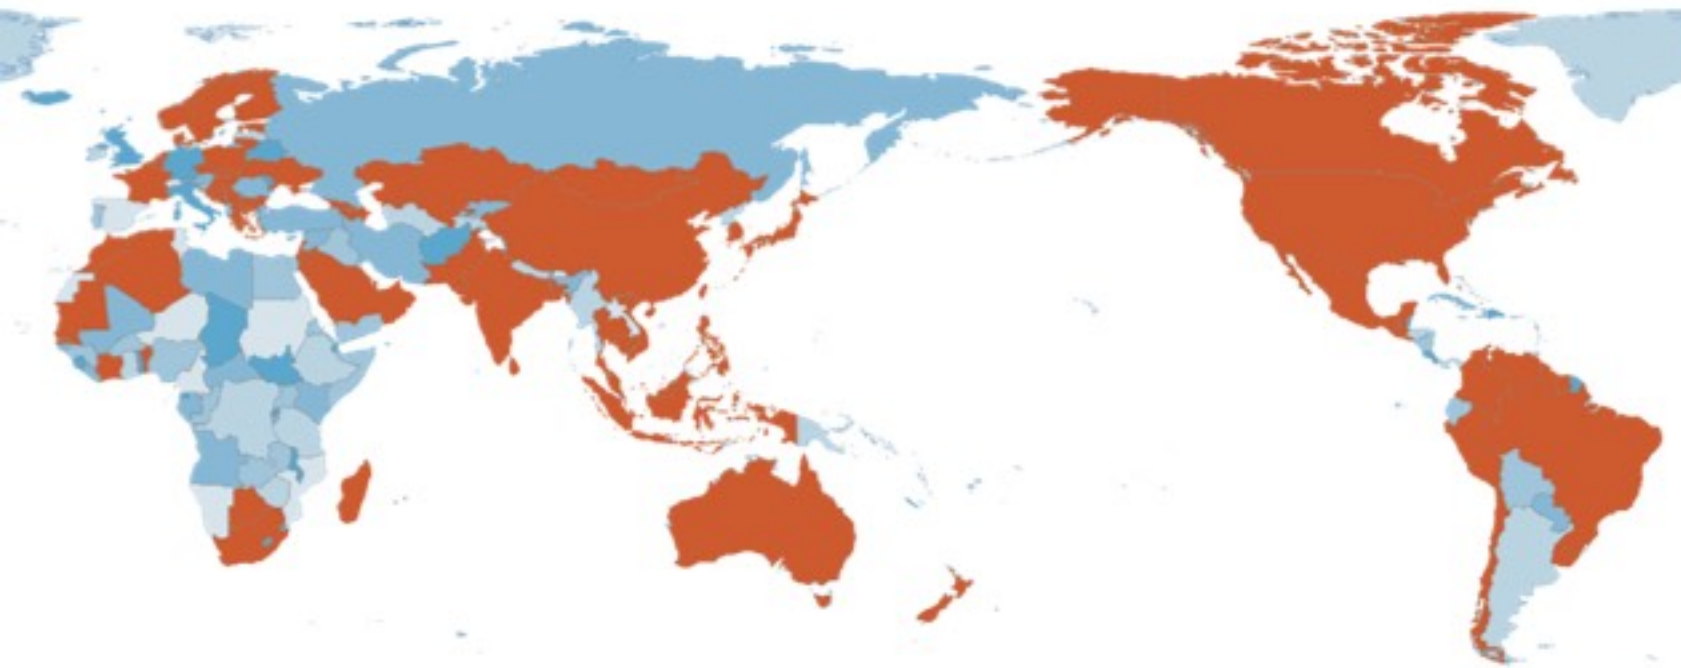

The orange parts show Symphony garage door product export footprint. We have established a steady cooperative relationship with our broad customer base all over the world. You can have believe in our products.



Symphony products have qualified for ISO9001 international quality system certification and CE certification, and obtained a number of national patents.

Custom Solutions

We offer turnkey solutions for customized garage doors. Design your own garage door through reading.



Panel Details




Type: 40 normal
 Material: galvanized steel
 Mximum Length: 11.8 m
 Surface color and texture customizable


Width: 40 mm
 Infilling: PU foam
 Height: 430 mm - 610 mm




Male head

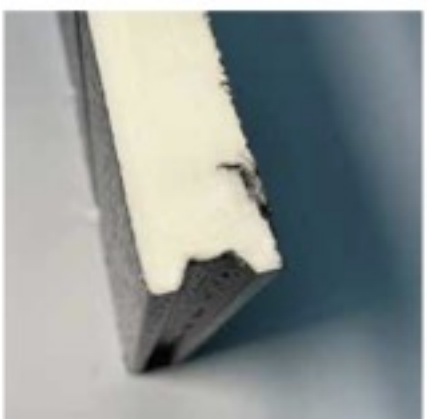


Female head

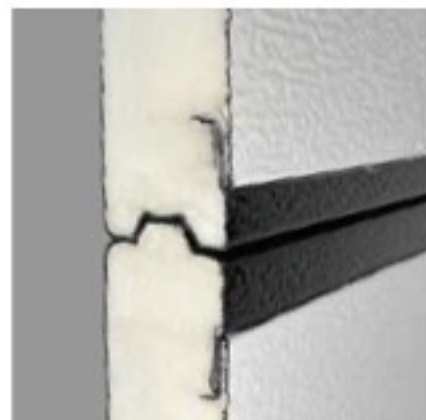

Connector

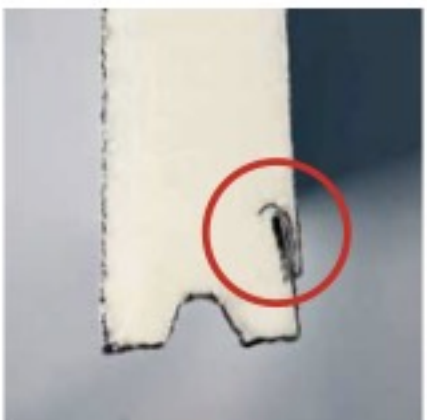

Four-layer steel to place hinges

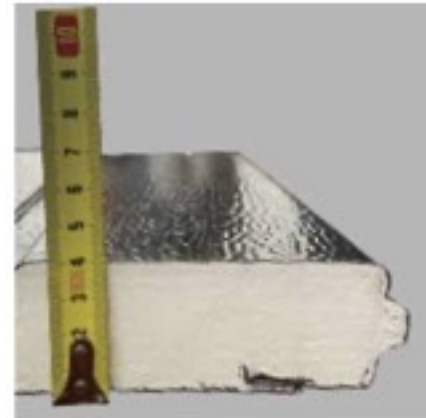

40mm width

Panel Details



Type: 40 finger protection
 Material: galvanized steel
 Mximum Length: 11.8 m
 Surface color and texture customizable

Width: 40 mm
 Infilling:PU foam
 Height: 430 mm - 610 mm




Male head



Female head



Connector

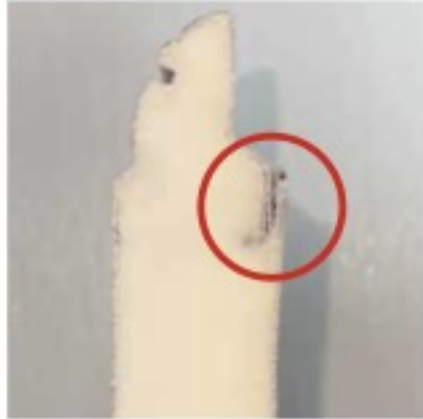

Four-layer steel to place hinges



40mm width

Panel Details




Type: 50 normal
Material: galvanized steel
Mximum Length: 11.8 m
Surface color and texture customizable


Width:50 mm
Infilling:PU foam
Height: 430 mm - 610 mm




Male head

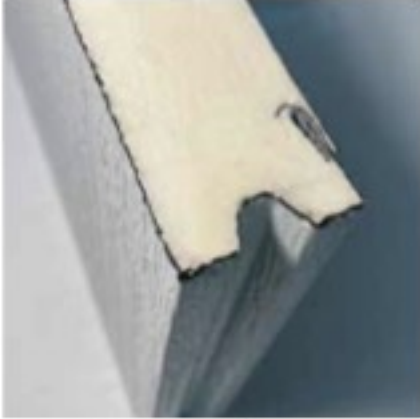


Female head

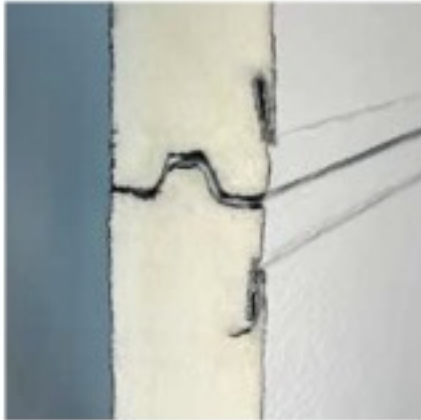

Connector

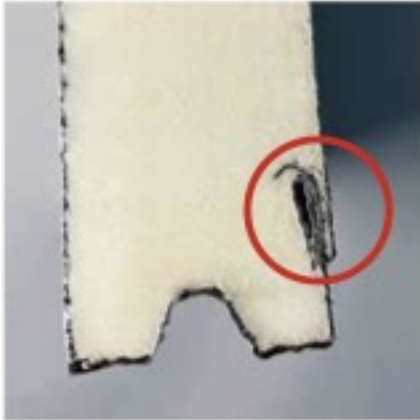

Four-layer steel to place hinges

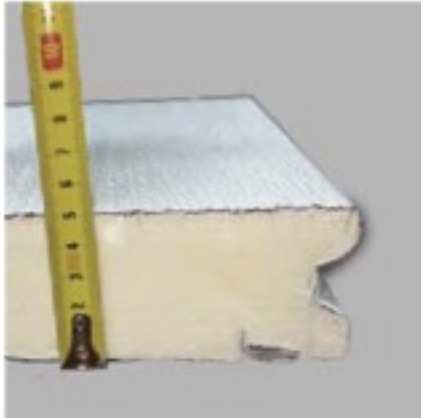

50mm width

Panel Unit Texture

Panel Design



1 Stripe




2 Stripes



3 Stripes



Flat

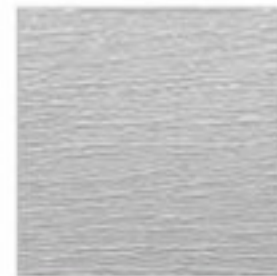

Wood Grain



Micro Wave



Orange Peel




Block
532 mm*350 mm



Universal Line



Middle Rib Line

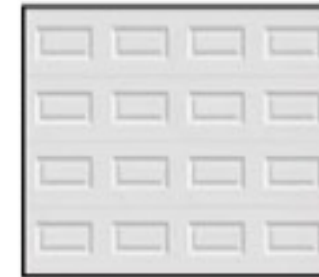

Single Garage Door



Two Rib Line




Micro Wave Line



Classic Cassette



Top One Line

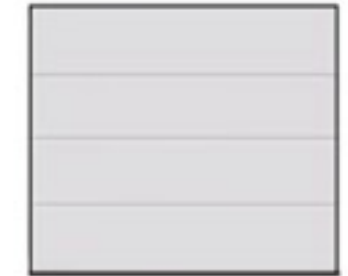

Flat



Observation Window



Color Options



White
RAL9016



Cream
RAL1015



Silver
RAL9006



Anthracite Grey
RAL7016



Sandpaper
Charcoal



Sandpaper
Black



Sandpaper
Black Walnut



Olive Brown
RAL6022




Chocolate Brown
RAL8017



Black
RAL9005



Brown
RAL8019

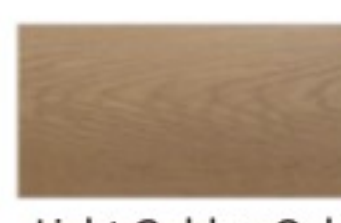

Light Golden Oak



Golden Oak



Dark Grey
RAL7024



Brown
N757




Dark Oak



Black Walnut

Lighting Window

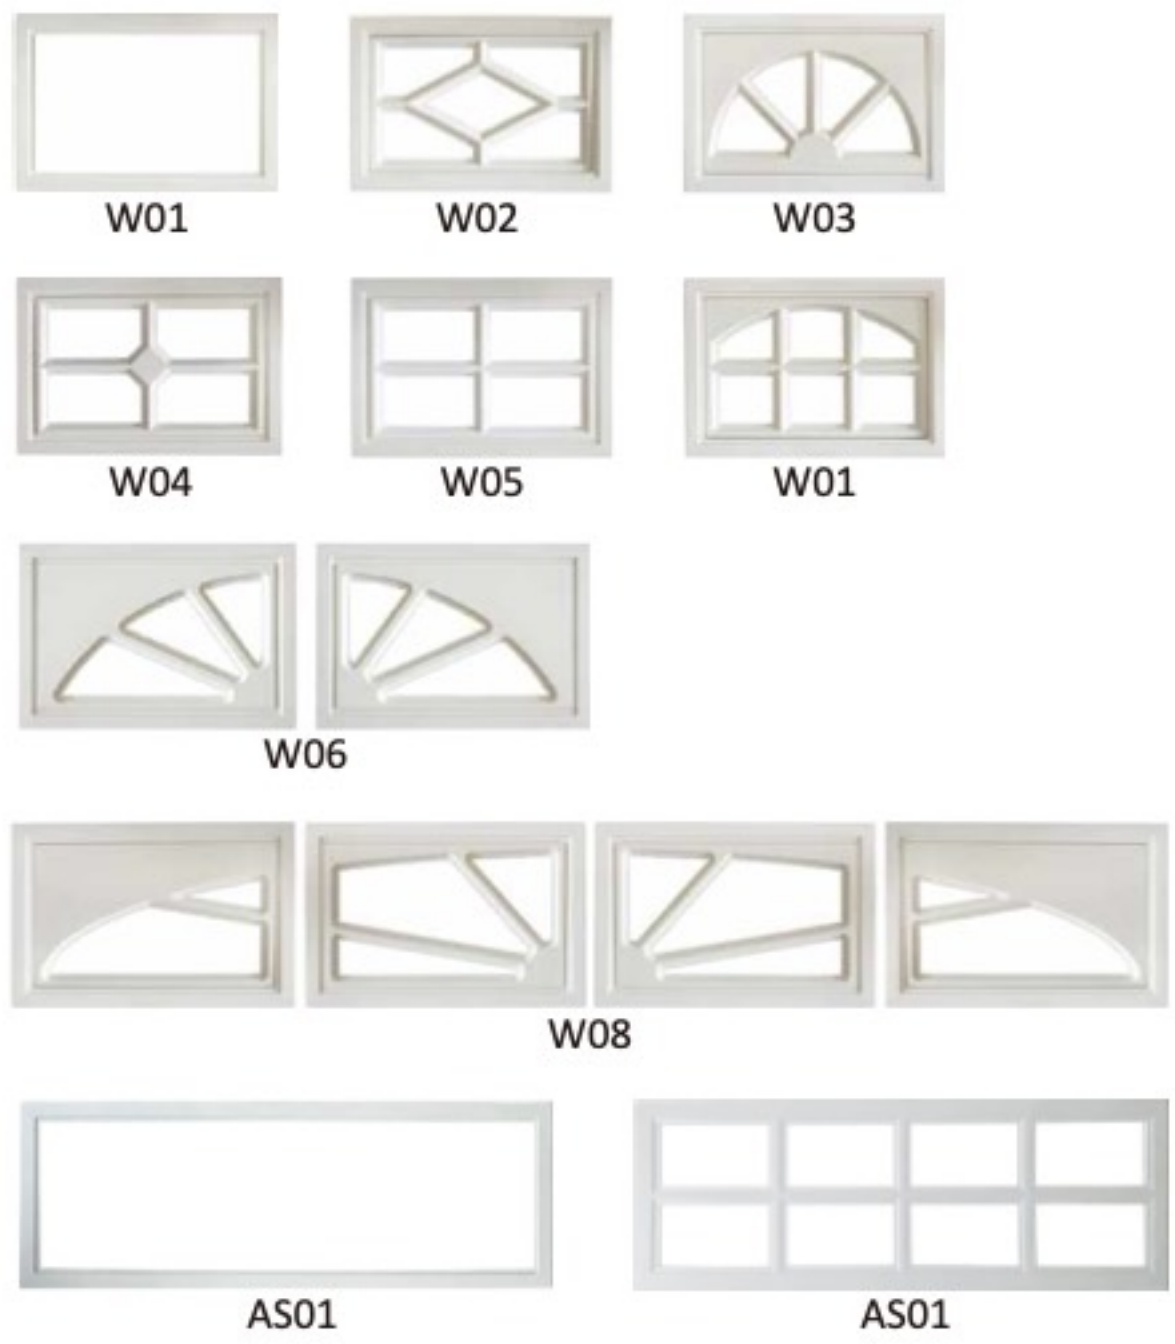

Measurements: the W series: 530 mm* 350 mm
 the AS series: 1030 mm* 350 mm



Hardware Kit

American Style hardware kit



Track



Measurements: 3" specification thickness for industrial doors 2.0 mm
 2" specification thickness for garage doors 1.5 mm
 Keyhole or round hole can be punched

European Style hardware kit



Track



Measurements: 3" specification thickness for industrial doors 2.0 mm
 2" specification thickness for garage doors 1.5 mm
 Auxiliary track thickness 1.5mm
 Keyhole or round hole can be punched


Motor Specifications



Power:	80w	100w	120w
Lifting:	800N	1000N	1200N
Panel Area:	12m ²	14m ²	16m ²
Input:	110 or 220 (1±10%)VAC 50-60Hz		
Motor:	24V DC		
Temperature:	-20°C~50°C		
Humidity:	<90%		
Frequency:	433.92MHz		
Coding:	Rolling Code		
Battery:	27A 12V		
Bulb:	25V 5W		



Motor

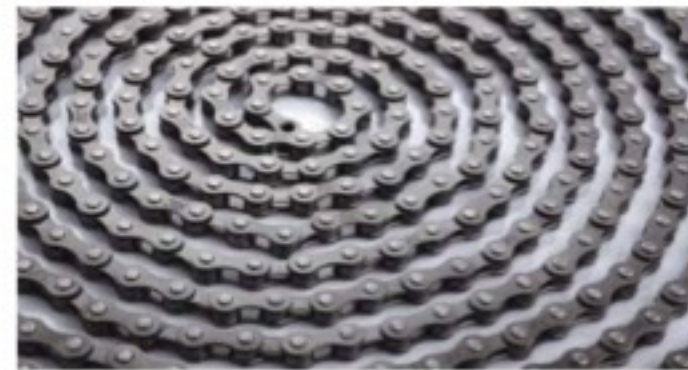

Driving chain



Driving belt



Infrared Sensor



Remote control

Other Products



Industrial Door



Roller Shutter Door



Window and Door

Symphony has expanded assembly line categories and quantity and to ensure quality stability. Symphony now has more than 20 automatic manufacturing lines for production including garage doors, exterior shading curtain window system, exterior insulation system, system windows and doors and passive window and door systems.

Industrial Door



Symphony Industrial doors provide thermal and acoustic insulation. They are specially designed for its use in warehouses, logistic centers and any type of installation.



Features

- Optimum safety
- Long lifespan and low maintenance
- Energy efficient
- Acoustic insulation




We have a wide range of industrial doors with a huge variety of finish and accessories according to the needs of each customer. Above are the colors available.

Product Illustration

Solid Shaft

The solid shaft with a key channel keeps a good balance for the weight of the door.

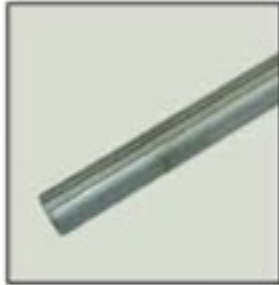


Torsion Spring

After precise calculation, the torsion spring can assist to open and close the door with door openers.




Track

High-quality steel track with anti-rust zinc layer.

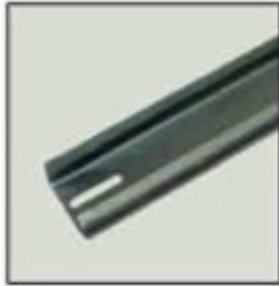

Cable Safety Device

Once the cable is broken, this safety device can protect people and goods from the sudden fall.

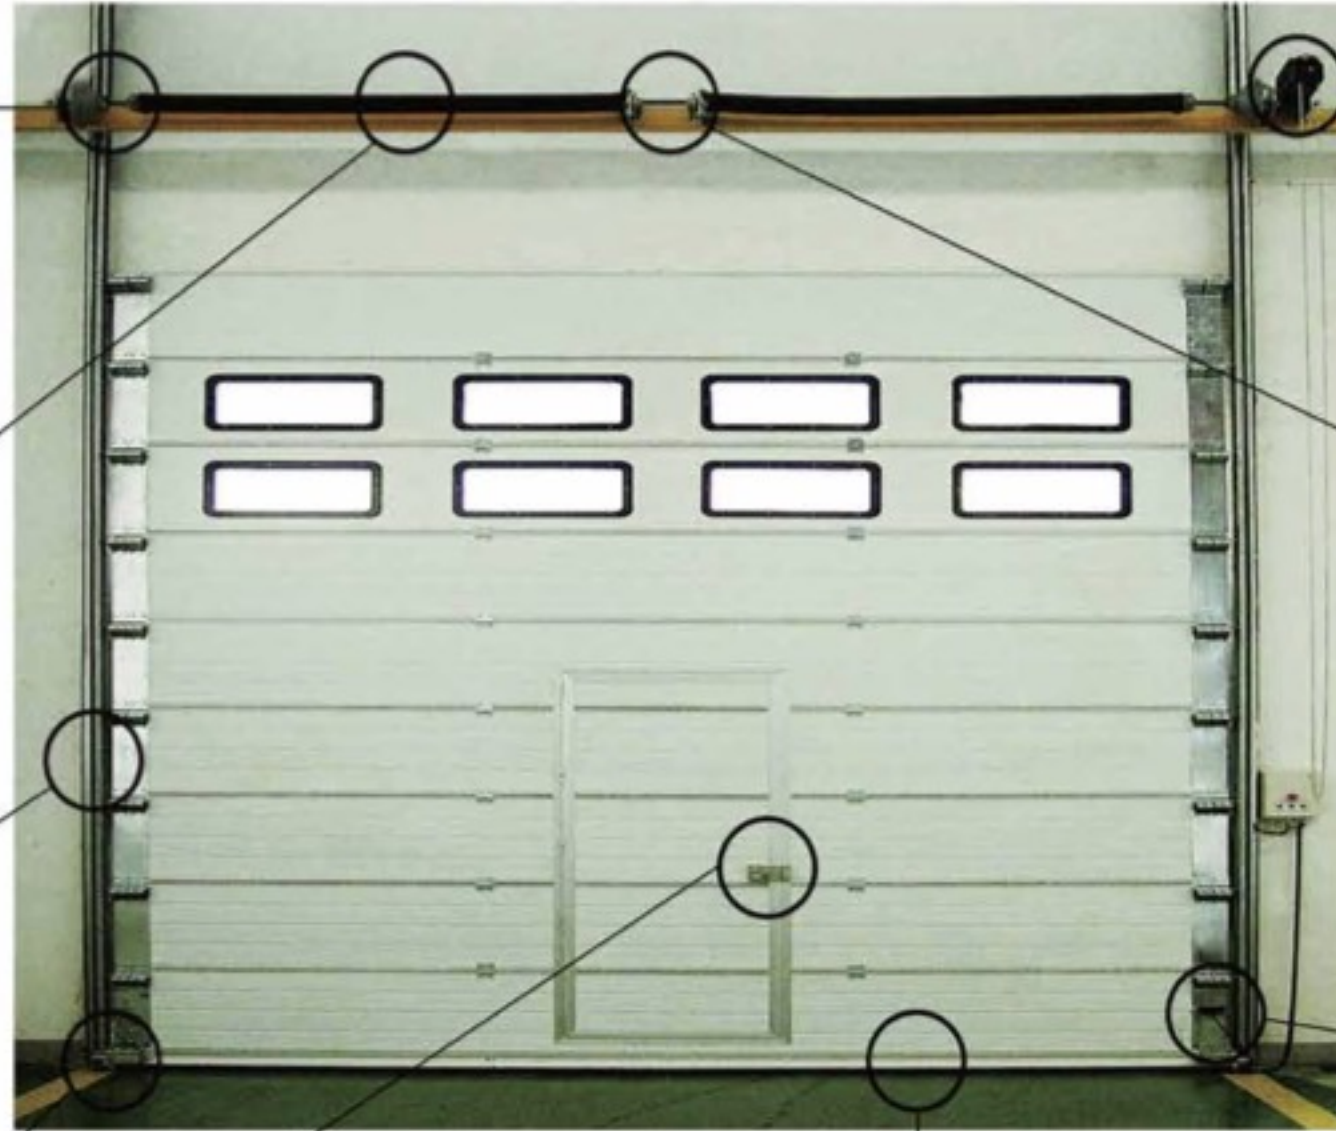

Pass Door Lock

An anti-theft lock with an elegant design.



Bottom Seal

Aluminum alloy profiles and flexible rubber bottom seal can keep the ponding and dust away.



Electric Door Opener

The high-quality industrial door opener can be adapted to different models of doors.



Spring Safety Device

Once the torsion spring is broken, this CE certified device can provide instant protection.




Security Airbag

The airbag stops the door when it hits an obstacle.


Roller Shutter Window and Door




Symphony roller shutter window and door products adopt advanced baking varnish steel filled with polyurethane foam without CFC inside. The light-weightness, high-density as well as the characteristics of thermalinsulation, dustproof and rust prevention give it a competitive advantage in usage in stores, residential garages, workshop, supermarkets, ware-houses, and other buildings.

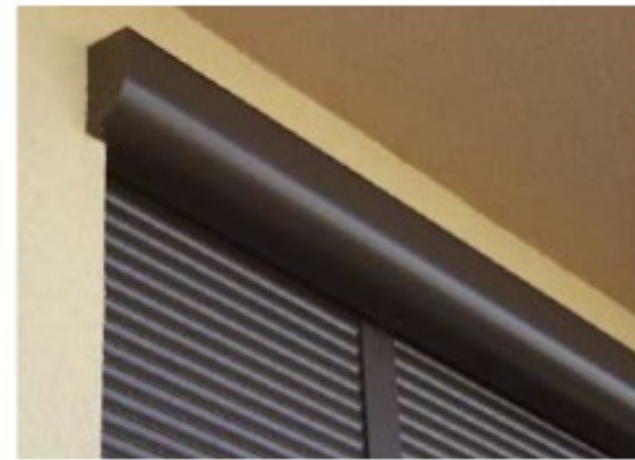


Product Illustration

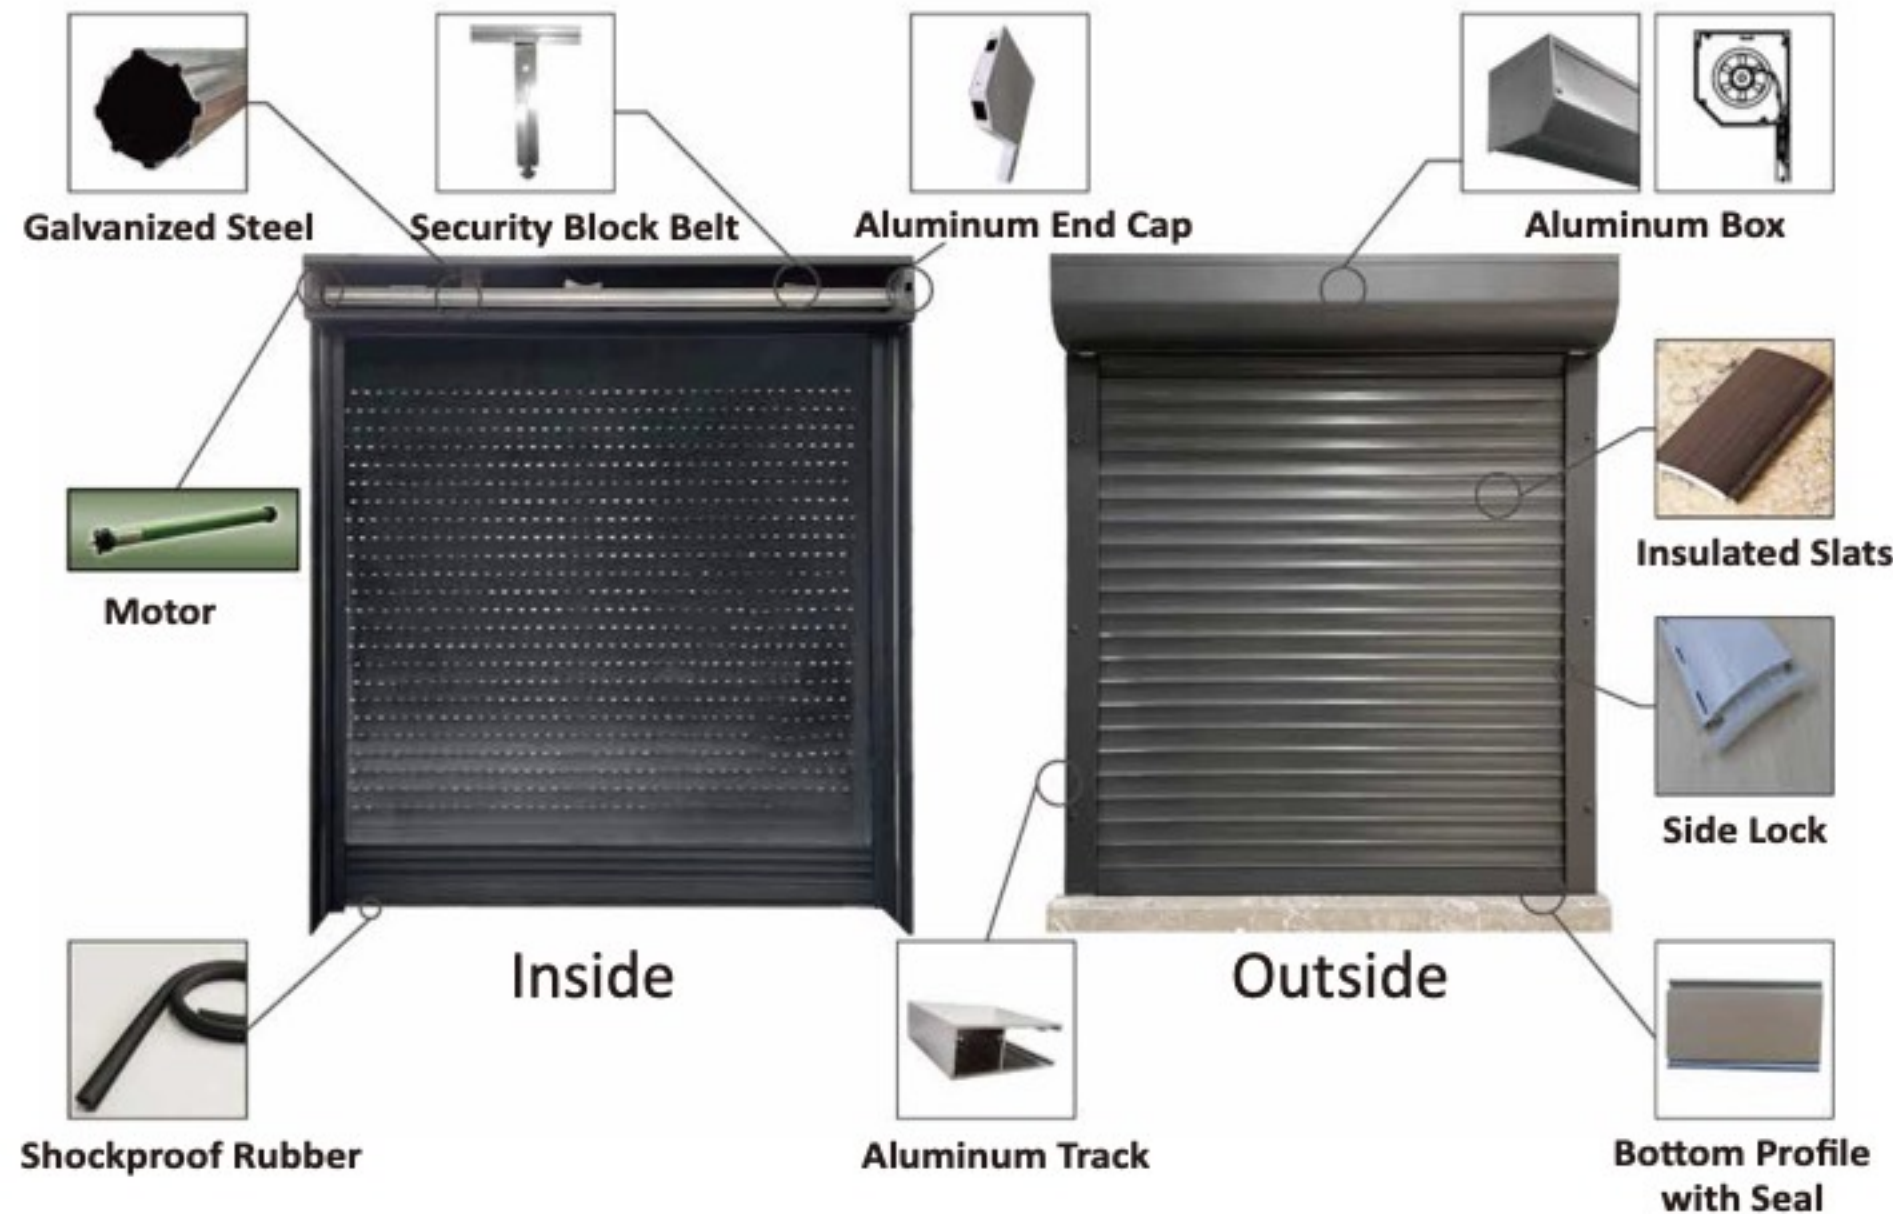


Slats Details

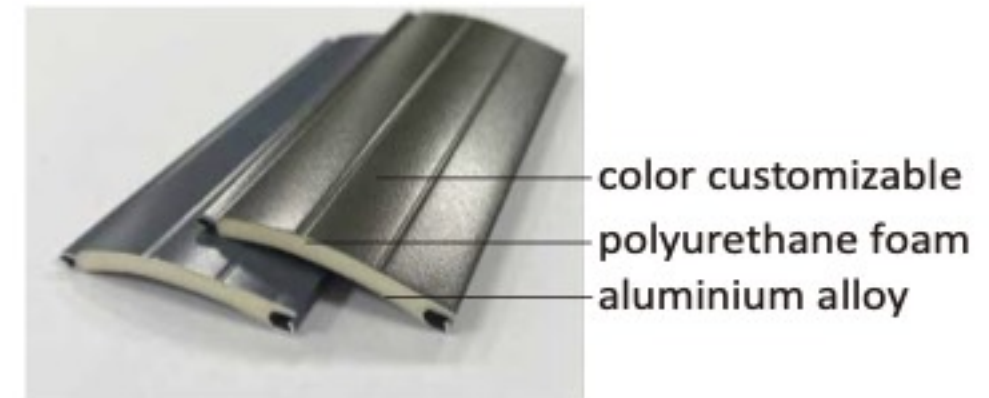

types and widths

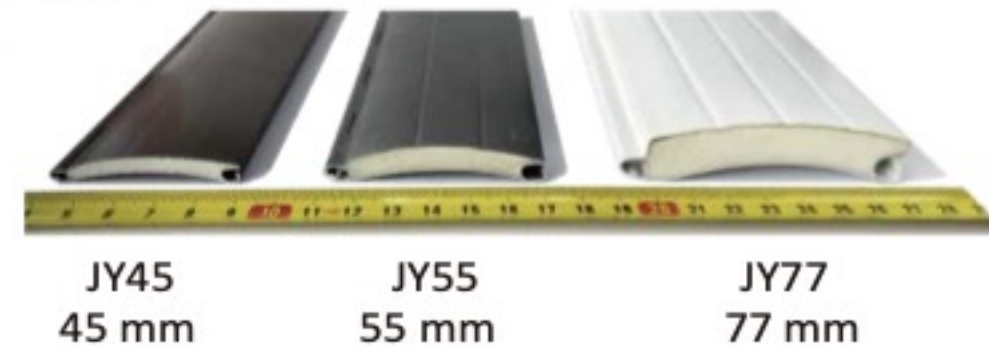

color options

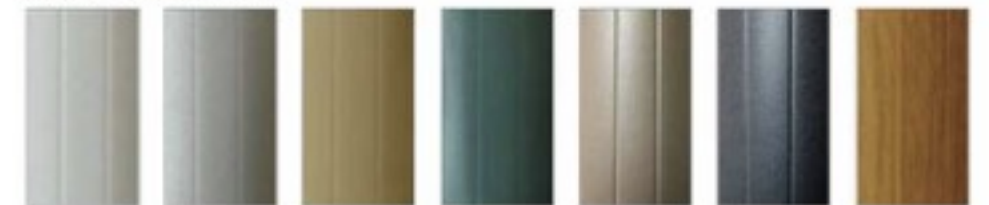

Workplace Real Shoot

